

Professional Audio Service Bulletin

Mincom
Division **3M**
COMPANY

BULLETIN NO. 2

SUBJECT: Replacement of MURA type Meter Lamps

APPLICABLE TO: ALL M-79 Professional Audio Recorders

PURPOSE: Improved Lamp Reliability

REQUIRED PARTS: 1) Lamp, Type 388, Mincom Catalog No. 83-1550-2689
2) Lamp Holder, Mincom Catalog No. 83-1620-0294

PROCEDURE:

- I. Remove MURA type meter lamp from the white line cap above the meter and unplug the wires from meter mother board.
- II. Solder wires on lamp holder 83-1620-0294 in place of the removed wires on the mother board (see Figure 1).

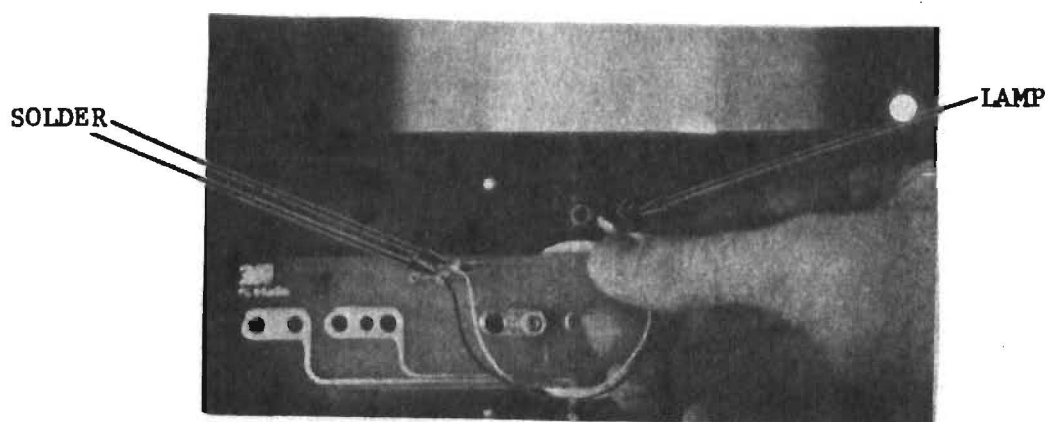


FIGURE 1

- III. Insert the lamp, type 388, in holder (83-1620-0294) and insert entire assembly in the white lens cap.
- IV. Future replacement of failed lamp will be accomplished by replacing the lamp only.

December 1973

Professional Audio Service Bulletin

3M

Bulletin No.
Date

BULLETIN NO. 2

SUBJECT: Replacement of MURA type Meter Lamps

APPLICABLE TO: ALL M-79 Professional Audio Recorders

PURPOSE: Improved Lamp Reliability

REQUIRED PARTS: 1) Lamp, Type 388, Mincom Catalog No. 83-1550-2689
2) Lamp Holder, Mincom Catalog No. 83-1620-0294

PROCEDURE:

- I. Remove MURA type meter lamp from the white line cap above the meter and unplug the wires from meter mother board.
- II. Solder wires on lamp holder 83-1620-0294 in place of the removed wires on the mother board (see Figure 1).

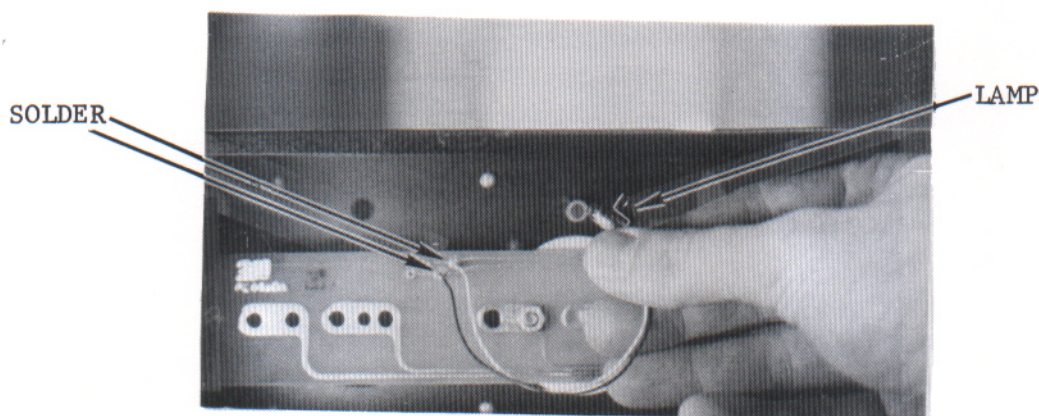


FIGURE 1

- III. Insert the lamp, type 388, in holder (83-1620-0294) and insert entire assembly in the white lens cap.
- IV. Future replacement of failed lamp will be accomplished by replacing the lamp only.

December 1973

RM-TSBA